



Getting Started

Before installation, check the product for any shipping damage. If you find any damage, do not install and contact your dealer or ICO.

Electrical Connections

All wiring should be done by a qualified licensed electrician



Caution

Read and follow all instructions before installing this LED mirror.



Danger

Shut off power before wiring the mirror.



Warning

Requires 120VAC 15-amp GFI protected circuit.

Ensure all wiring is in accordance with local guidelines.

IMPORTANT SAFETY INSTRUCTIONS



Warning

To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.

GROUNDING INSTRUCTIONS



Danger

Risk of electric shock. Connect this furnishing to a properly grounded circuit only.

This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.


For an electrical hardwire option, the LED mirror must be wired to a 15-amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations as per your respective local Electrical Code.

REQUIRED TOOLS & MATERIALS

PARTS INCLUDED



INSTALLATION & POWER OUTLET GUIDE

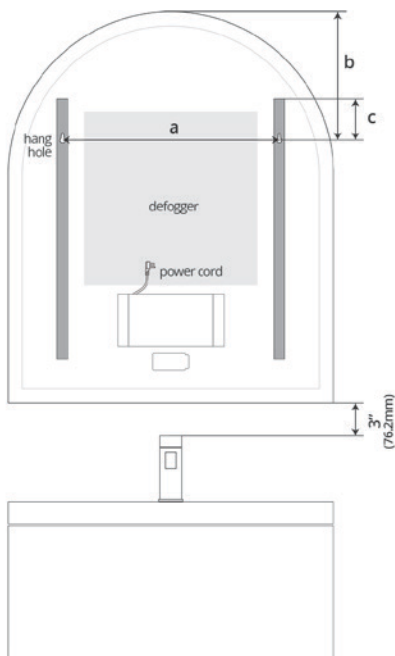

- a** - distance between hang holes
- b** - height - top of the mirror to hang hole
- c** - height - top of the support to hang hole

Power cord length is 39 3/8" (1000mm) but do an actual measurement, especially if the power outlet or junction box is farther than 30" (762mm).


Measure and determine overall mirror dimensions as well as "a", "b" & "c" (see diagram) before installation.

All dimensions and specifications in the table below are approximate and may vary without prior notice.

Use your actual product measurement for accuracy.

Model #	a (distance between hang holes)	b (height - top of the mirror to hang hole)	c (height - top of the support to hang hole)	Product Dimension
IG1130	"19 5/8" (483mm)	"11 5/8" (295mm)	"3 3/4" (95mm)	"29 1/2" x 35 3/8" x 1 1/8" (750mm x 900mm x 30mm)
IG1124	"15 3/4" (400mm)	"11 5/8" (295mm)	"3 3/4" (95mm)	24" x 36" x 1 1/8" (600mm x 900mm x 30mm)

*Download the specific model's tech spec sheet on our website for other measurements

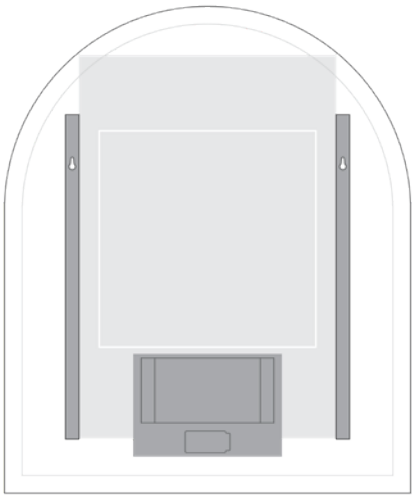

Color Shading Guide

- Ideal location of the electrical outlet or junction box.
- Location not advisable! Moreover, power cord must not cross or be over any part of this shaded part.

**Diagram is for electrical outlet located behind the mirror. If electrical outlet is to the side or at the bottom/top of the mirror, always consider the length of the power cord (see previous page for measurement) and the darker shades in these diagrams where cord and/or plug must not cross over or be on top of.*